INCOMPARABLE DEEP CYCLE AGM BATTERY


LDC12-180 (12V180Ah)







CHARACTERISTICS

	Specifications
	12V
Length	483mm (19.0inches)
Width	170mm (6.69inches)
Container Height	238.5mm (9.39inches)
Total Height	238.5mm (9.39inches)
	50.1kg (110.5lbs)
	T11(M8)
	ABS
25A	395min
56A	155min
20HR	180Ah
Capacity 5HR	162Ah
Discharge	-20~55°C (-4~131°F)
Charge	0~40°C (32~104°F)
Storage	-15~40°C (5~104°F)
	Width Container Height Total Height 25A 56A 20HR 5HR Discharge Charge

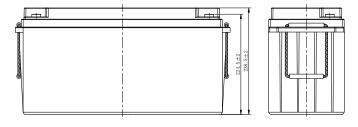

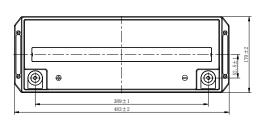



Note: Terminal Torque Values in-lb(Nm):97.28-130.0(11.0-14.7)

APPLICATIONS

- · Electric vehicle
- Golf cart
- Sightseeing
- · Cleaning equipment
- AWP
- Mobility

















INCOMPARABLE DEEP CYCLE AGM BATTERY

LDC12-180 (12V180Ah)



GENERAL FEATURES

Stable initial capacity

- · PAM/NAM amount optimization
- · 4BS crystal paste mixing & curing technology
- · Double layer separator technology
- · Improved design electrolyte S.G.

Less water loss

- · PAM/NAM amount optimization
- · New PAM/NAM recipe introduced
- · Rare earth alloy

Solve NAM sulphation

- · Carbon boost technology
- · Pre-sulfate technology

Improved PSoC cycling

- · Carbon boost technology
- · Mix carbon boost technology
- Targeting for higher level through carbon technology

Delay PAM softening and shedding


- · Plate assembly pressure re-engineering
- · 4BS crystal paste mixing & curing technology
- · Higher paste density


Optimize electrolyte stratification


· Introduce AGM-GEL technology


Excellent deep cycle performance

- · Plate assembly pressure re-engineering
- · New PAM/NAM recipe introduced
- · Gel electrolyte technology
- · Rare earth alloy
- Double layer separator technology
- · Lower acid filling temperature

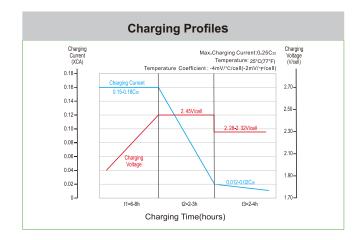

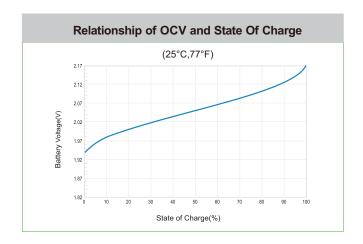

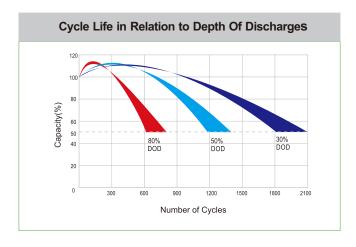

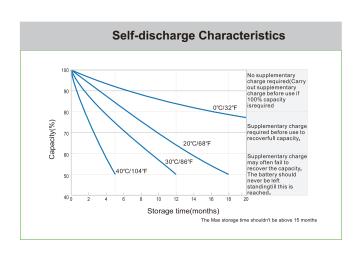

Leoch International Technology Ltd.

www.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

Leoch Battery Corporation

www.leochamericas.com

Leoch Europe S.A.

www.leoch.eu