INCOMPARABLE DEEP CYCLE AGM BATTERY


LDC12-26 (12V26Ah)








CHARACTERISTICS

	Specifications
	12V
Length	181.0mm (7.13inches)
nsion	76.5mm (3.01inches)
Container Height	171mm (6.73inches)
Total Height	171mm (6.73inches)
	6.85kg (15.1lbs)
	T15(M5)
	ABS
20HR	26Ah
5HR	24Ah
Discharge	-20~55°C (-4~131°F)
Charge	0~40°C (32~104°F)
Storage	-15~40°C (5~104°F)
	Width Container Height Total Height 20HR 5HR Discharge Charge











APPLICATIONS

- · Electric motorcycle
- Electric bicycle
- Wheelchair

















Note: Terminal Torque Values in-lb(Nm):17.69-26.53(2.0-3.0)

INCOMPARABLE DEEP CYCLE AGM BATTERY

LDC12-26 (12V26Ah)



GENERAL FEATURES

Stable initial capacity

- · PAM/NAM amount optimization
- · 4BS crystal paste mixing & curing technology
- · Double layer separator technology
- · Improved design electrolyte S.G.

Less water loss

- · PAM/NAM amount optimization
- · New PAM/NAM recipe introduced
- · Rare earth alloy

Solve NAM sulphation

- · Carbon boost technology
- · Pre-sulfate technology

Improved PSoC cycling

- · Carbon boost technology
- · Mix carbon boost technology
- Targeting for higher level through carbon technology

Delay PAM softening and shedding


- · Plate assembly pressure re-engineering
- · 4BS crystal paste mixing & curing technology
- · Higher paste density


Optimize electrolyte stratification


· Introduce AGM-GEL technology


Excellent deep cycle performance

- · Plate assembly pressure re-engineering
- · New PAM/NAM recipe introduced
- · Gel electrolyte technology
- · Rare earth alloy
- · Double layer separator technology
- · Lower acid filling temperature

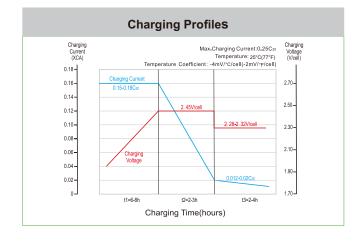

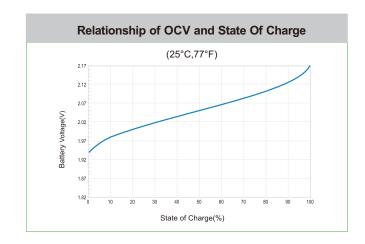

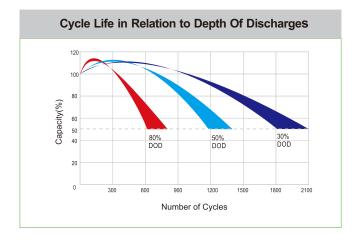

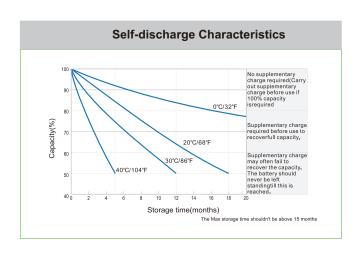

Leoch International Technology Ltd.

www.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg
www.leochamericas.com

Leoch Battery Corporation

Leoch Europe S.A.

www.leoch.eu