


# INCOMPARABLE DEEP CYCLE AGM BATTERY

LDC12-90C (12V90Ah)




## CHARACTERISTICS

| Item                  | Specifications   |                     |
|-----------------------|------------------|---------------------|
| Voltage               | 12V              |                     |
| Dimension             | Length           | 260mm (10.2inches)  |
|                       | Width            | 168mm (6.61inches)  |
|                       | Container Height | 208mm (8.19inches)  |
|                       | Total Height     | 214mm (8.43inches)  |
| Approx Weight         | 23.3kg (51.4lbs) |                     |
| Terminal              | T6(M6)           |                     |
| Container Material    | ABS              |                     |
| Reserve Capacity      | 25A              | 160min              |
|                       | 56A              | 53min               |
| Capacity              | 20HR             | 90Ah                |
|                       | 5HR              | 77Ah                |
| Operating Temp. Range | Discharge        | -20~55°C (-4~131°F) |
|                       | Charge           | 0~40°C (32~104°F)   |
|                       | Storage          | -15~40°C (5~104°F)  |

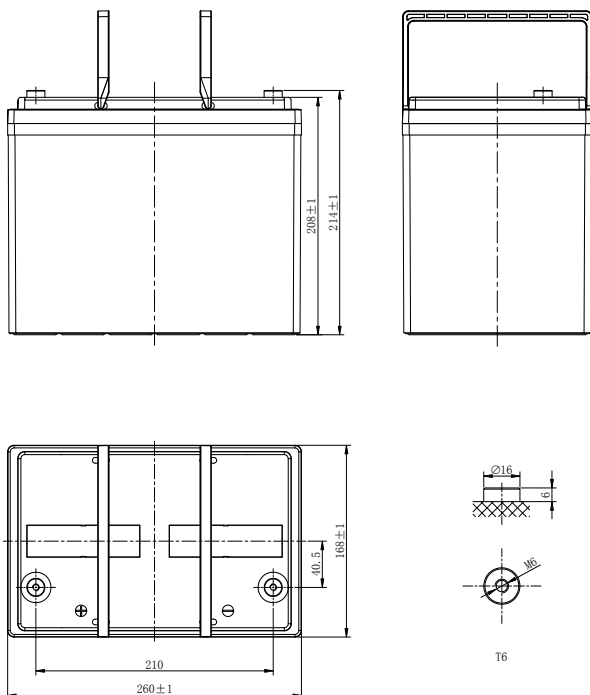

## APPLICATIONS

- Electric vehicle
- Golf cart
- Sightseeing
- Cleaning equipment
- AWP
- Mobility



Note: Terminal Torque Values in-lb(Nm):34.39-47.75(3.9-5.4)



# INCOMPARABLE DEEP CYCLE AGM BATTERY

LDC12-90C (12V90Ah)

## GENERAL FEATURES

### Stable initial capacity

- PAM/NAM amount optimization
- 4BS crystal paste mixing & curing technology
- Double layer separator technology
- Improved design electrolyte S.G.

### Less water loss

- PAM/NAM amount optimization
- New PAM/NAM recipe introduced
- Rare earth alloy

### Solve NAM sulphation

- Carbon boost technology
- Pre-sulfate technology

### Improved PSoC cycling

- Carbon boost technology
- Mix carbon boost technology
- Targeting for higher level through carbon technology

### Delay PAM softening and shedding

- Plate assembly pressure re-engineering
- 4BS crystal paste mixing & curing technology
- Higher paste density


### Optimize electrolyte stratification

- Introduce AGM-GEL technology


### Excellent deep cycle performance

- Plate assembly pressure re-engineering
- New PAM/NAM recipe introduced
- Gel electrolyte technology
- Rare earth alloy
- Double layer separator technology
- Lower acid filling temperature


### Charging Profiles

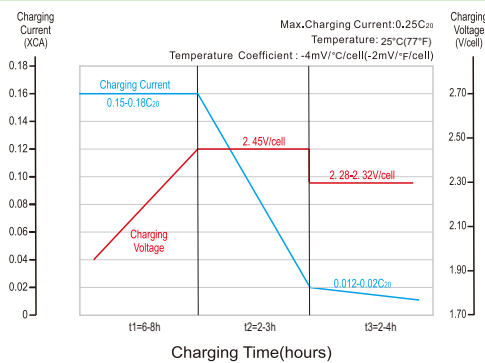

### Relationship of OCV and State Of Charge

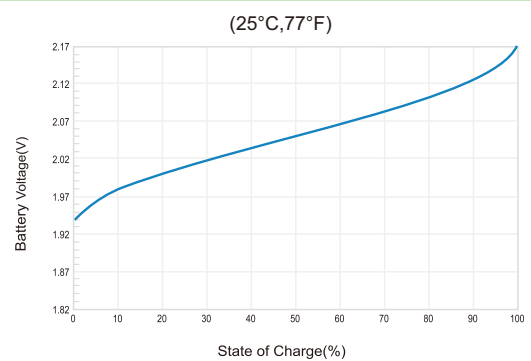

### Cycle Life in Relation to Depth Of Discharges

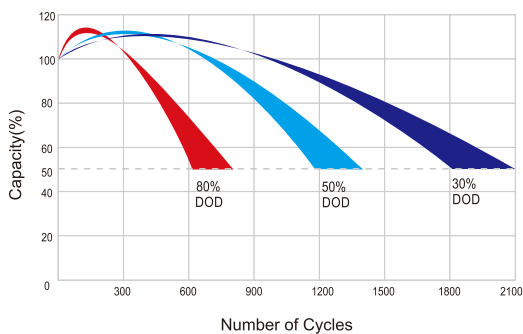

### Self-discharge Characteristics

