

INCOMPARABLE DEEP CYCLE AGM BATTERY


LDC6-265-GC2 (6V268Ah)











Note: Terminal Torque Values in-lb(Nm):97.28-130.0(11.0-14.7)

CHARACTERISTICS

Item		Specifications
Voltage		6V
Dimension	Length	260mm (10.2inches)
	Width	180mm (7.09inches)
	Container Height	265mm (10.4inches)
	Total Height	268mm (10.6inches)
Approx Weight		32.9kg (72.5lbs)
Terminal		T11(M8)
Container Material		ABS
Reserve Capacity	25A	550mir
	75A	165mir
Capacity	20HR	268Ah
	5HR	220Ah
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-15~40°C (5~104°F)

APPLICATIONS

- · Electric vehicle
- Golf cart
- Sightseeing
- · Cleaning equipment
- AWP
- Mobility

















INCOMPARABLE DEEP CYCLE AGM BATTERY

LDC6-265-GC2 (6V268Ah)



GENERAL FEATURES

Stable initial capacity

- · PAM/NAM amount optimization
- · 4BS crystal paste mixing & curing technology
- · Double layer separator technology
- · Improved design electrolyte S.G.

Less water loss

- · PAM/NAM amount optimization
- · New PAM/NAM recipe introduced
- · Rare earth alloy

Solve NAM sulphation

- · Carbon boost technology
- · Pre-sulfate technology

Improved PSoC cycling

- · Carbon boost technology
- · Mix carbon boost technology
- Targeting for higher level through carbon technology

Delay PAM softening and shedding


- · Plate assembly pressure re-engineering
- · 4BS crystal paste mixing & curing technology
- · Higher paste density


Optimize electrolyte stratification


· Introduce AGM-GEL technology


Excellent deep cycle performance

- · Plate assembly pressure re-engineering
- · New PAM/NAM recipe introduced
- · Gel electrolyte technology
- · Rare earth alloy
- · Double layer separator technology
- · Lower acid filling temperature

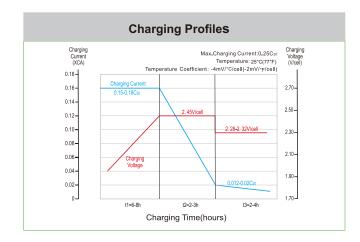

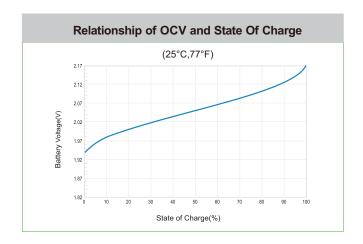

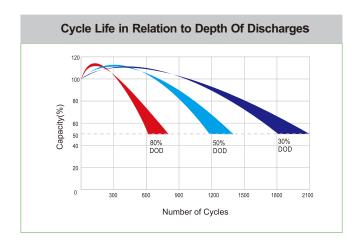

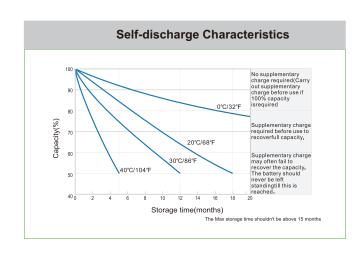

Leoch International Technology Ltd.

mww.leoch.com

Leoch Batteries Pte Ltd

m www.leoch.sg

www.leochamericas.com

Leoch Battery Corporation

Leoch Europe S.A.

www.leoch.eu