

LPC SERIES-CYCLE APPLICATION

LPC12-20 (12V20Ah)



CHARACTERISTICS


Item	Specifications	
Voltage	12V	
Dimension	Length	181.5mm (7.15inches)
	Width	76.5mm (3.01inches)
	Container Height	167.5mm (6.59inches)
	Total Height	167.5mm (6.59inches)
Approx Weight	6kg (13.2lbs)	
Terminal	T12/T12-I(M5)	
Container Material	ABS	
Short-circuit current	560A	
Internal Resistance (25°C)	≤ 14 mΩ	
Self Discharge	≤3% per month at 25°C (77°F)	
Capacity	20HR	20Ah
	10HR	18.9Ah
	5HR	17.3Ah
Operating Temp.Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~50°C (-4~122°F)

APPLICATIONS

- Golf trolley
- Medical facility
- Mobility scooter
- Electric wheelchair
- Other mobility device

STANDARDS

- ACC. to BCI standards
- Manufactured in Leoch® IATF16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities

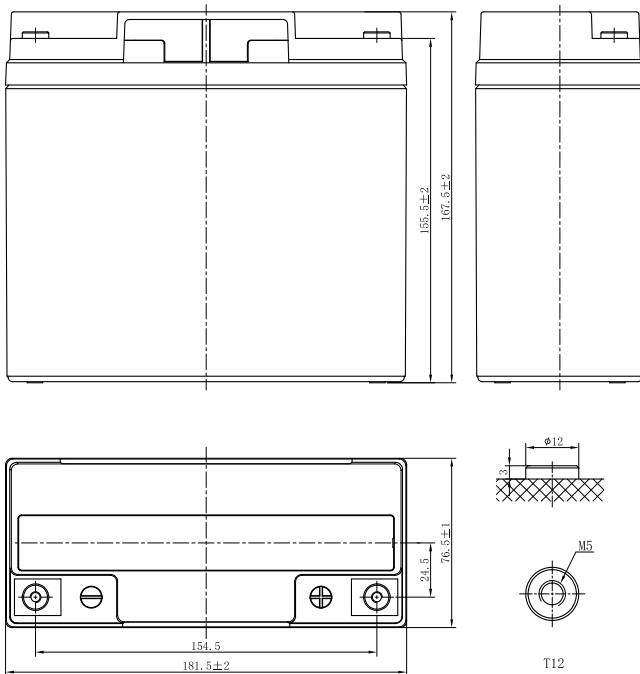


LPC SERIES-CYCLE APPLICATION

LPC12-20 (12V20Ah)


GENERAL FEATURES

- Good cyclic property: Enhanced overcharge endurance and overdischarge recovery property
- Using oxygen recombination technology: maintenance-free
- Lower acid density, excess of electrolyte and larger distance between plates to keep battery at low temperature and slow down plate grid corrosion speed
- Unique plate group configuration, high quality AGM separator and battery management system ensure battery with a longer service life


Discharge Characteristics

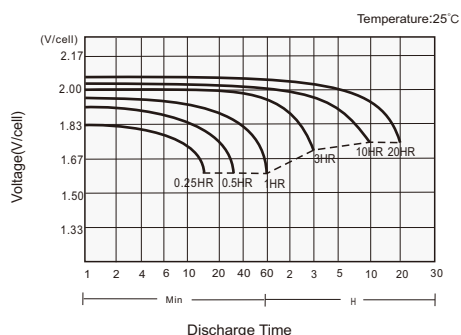

Charging Characteristics

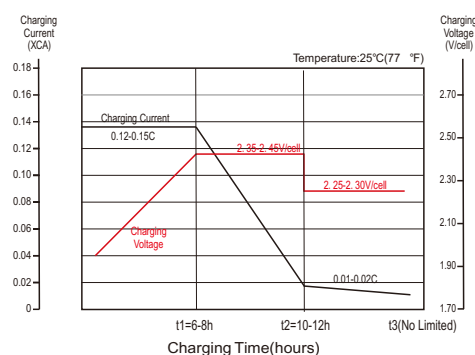

Cycle Life in Relation to Depth of Discharge

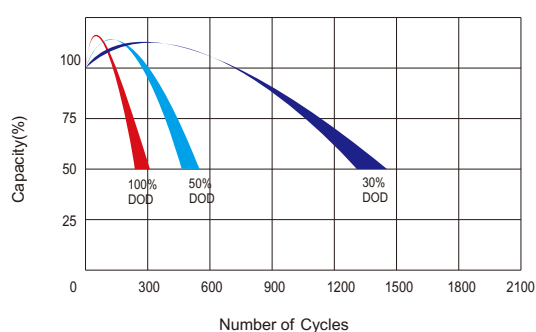

Self Discharge Characteristics

