


LPC SERIES-CYCLE APPLICATION

LPC12-3.5 (12V3.5Ah)



CHARACTERISTICS

Item	Specifications	
Voltage	12V	
Dimension	Length	134mm (5.28inches)
	Width	67mm (2.64inches)
	Container Height	59.5mm (2.34inches)
	Total Height	65.5mm (2.58inches)
Approx Weight	1.19kg (2.62lbs)	
Terminal	T1/T2	
Container Material	ABS	
Short-circuit current	98A	
Internal Resistance (25°C)	≤ 40 mΩ	
Self Discharge	≤3% per month at 25°C (77°F)	
Capacity	20HR	3.5Ah
	10HR	3.31Ah
	5HR	3.01Ah
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~50°C (-4~122°F)

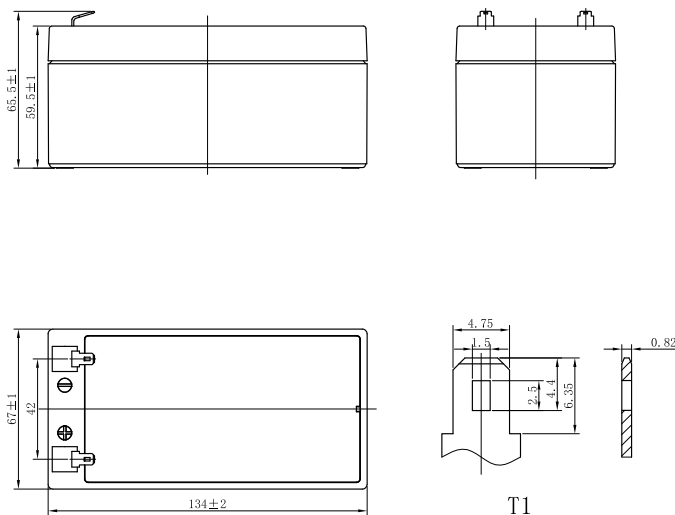

APPLICATIONS

- Golf trolley
- Medical facility
- Mobility scooter
- Electric wheelchair
- Other mobility device

STANDARDS

- ACC. to BCI standards
- Manufactured in Leoch® IATF16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities


LPC SERIES-CYCLE APPLICATION

LPC12-3.5 (12V3.5Ah)


GENERAL FEATURES

- Good cyclic property: Enhanced overcharge endurance and overdischarge recovery property
- Using oxygen recombination technology: maintenance-free
- Lower acid density, excess of electrolyte and larger distance between plates to keep battery at low temperature and slow down plate grid corrosion speed
- Unique plate group configuration, high quality AGM separator and battery management system ensure battery with a longer service life


Discharge Characteristics

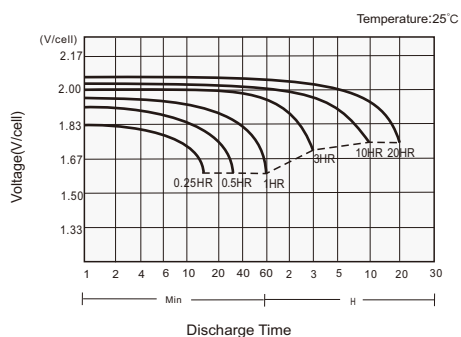

Charging Characteristics

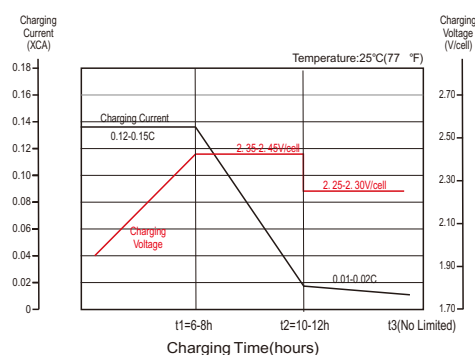

Cycle Life in Relation to Depth of Discharge

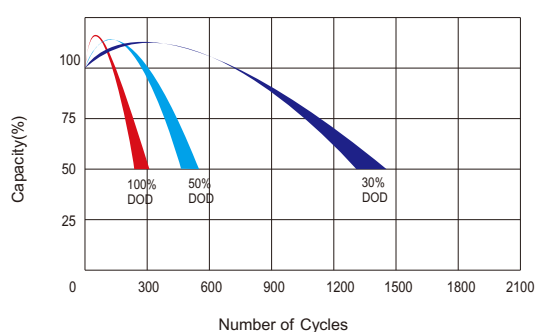

Self Discharge Characteristics

