


LPC SERIES-CYCLE APPLICATION

LPC12-8.0 (12V8Ah)



CHARACTERISTICS

Item	Specifications	
Voltage	12V	
Dimension	Length	151mm (5.94inches)
	Width	65mm (2.56inches)
	Container Height	93.5mm (3.68inches)
	Total Height	99.5mm (3.92inches)
Approx Weight	2.5kg (5.51lbs)	
Terminal	T1/T2	
Container Material	ABS	
Short-circuit current	224A	
Internal Resistance (25°C)	≤ 20 mΩ	
Self Discharge	≤3% per month at 25°C (77°F)	
Capacity	20HR	8Ah
	10HR	7.57Ah
	5HR	7Ah
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~50°C (-4~122°F)

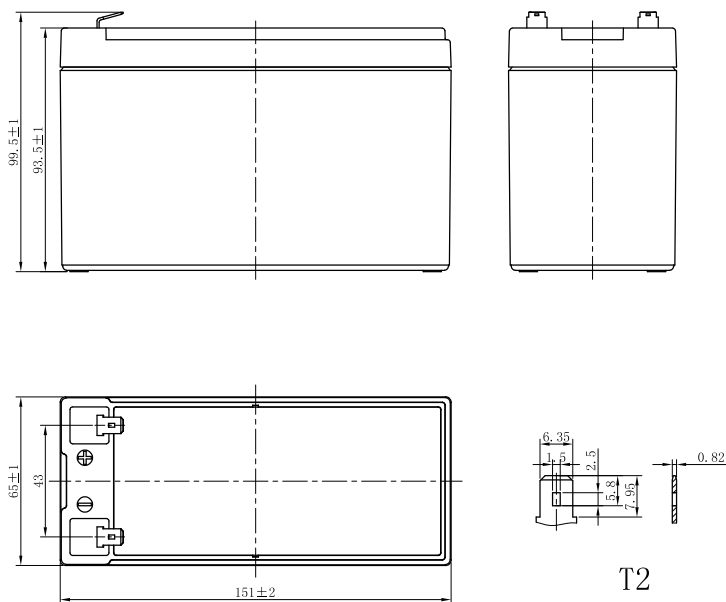

APPLICATIONS

- Golf trolley
- Medical facility
- Mobility scooter
- Electric wheelchair
- Other mobility device

STANDARDS

- ACC. to BCI standards
- Manufactured in Leoch® IATF16949, ISO 9001, ISO 14001 and ISO 45001 certified production facilities


LPC SERIES-CYCLE APPLICATION

LPC12-8.0 (12V8Ah)


GENERAL FEATURES

- Good cyclic property: Enhanced overcharge endurance and overdischarge recovery property
- Using oxygen recombination technology: maintenance-free
- Lower acid density, excess of electrolyte and larger distance between plates to keep battery at low temperature and slow down plate grid corrosion speed
- Unique plate group configuration, high quality AGM separator and battery management system ensure battery with a longer service life


Discharge Characteristics

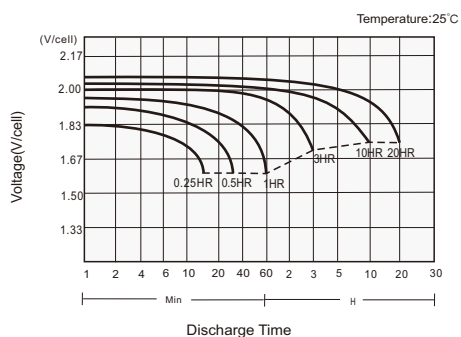

Charging Characteristics

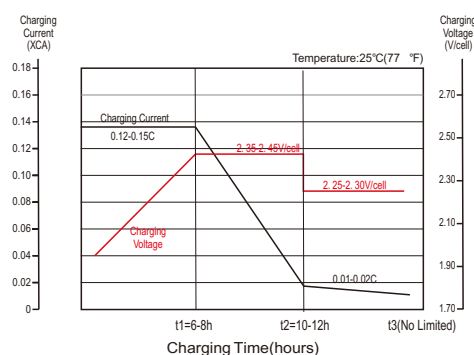

Cycle Life in Relation to Depth of Discharge

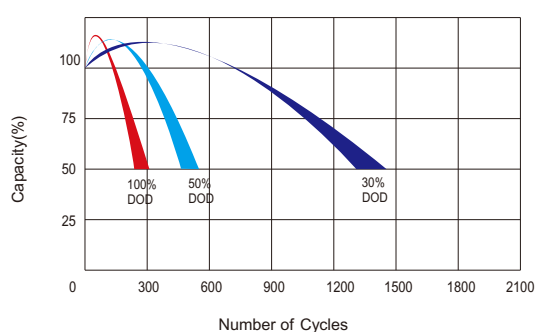

Self Discharge Characteristics

