INCOMPARABLE DEEP CYCLE AGM BATTERY


LDC8-165-GC8 (8V165Ah)






CHARACTERISTICS


	Specifications
	8V
Length	260mm (10.2inches)
Width	180mm (7.09inches)
Container Height	252mm (9.92inches)
Total Height	274mm (10.8inches)
	29.27kg (64.5lbs)
	DT(5/16")
	PP
eserve Capacity 25A	325min
56A	130min
20HR	165Ah
5HR	140Ah
Discharge	-20~55°C (-4~131°F)
Charge	0~40°C (32~104°F)
Storage	-15~40°C (5~104°F)
	Width Container Height Total Height 25A 56A 20HR 5HR Discharge Charge






APPLICATIONS

- · Electric vehicle
- Golf cart
- Sightseeing
- · Cleaning equipment
- AWP
- Mobility





















Note: Terminal Torque Values in-lb(Nm):176-203(20-23)

INCOMPARABLE DEEP CYCLE AGM BATTERY





GENERAL FEATURES

Stable initial capacity

- · PAM/NAM amount optimization
- · 4BS crystal paste mixing & curing technology
- · Double layer separator technology
- · Improved design electrolyte S.G.

Less water loss

- PAM/NAM amount optimization
- · New PAM/NAM recipe introduced
- · Rare earth alloy

Solve NAM sulphation

- · Carbon boost technology
- · Pre-sulfate technology

Improved PSoC cycling

- · Carbon boost technology
- · Mix carbon boost technology
- Targeting for higher level through carbon technology

Delay PAM softening and shedding


- · Plate assembly pressure re-engineering
- · 4BS crystal paste mixing & curing technology
- · Higher paste density


Optimize electrolyte stratification


· Introduce AGM-GEL technology


Excellent deep cycle performance

- · Plate assembly pressure re-engineering
- · New PAM/NAM recipe introduced
- · Gel electrolyte technology
- · Rare earth alloy
- · Double layer separator technology
- · Lower acid filling temperature

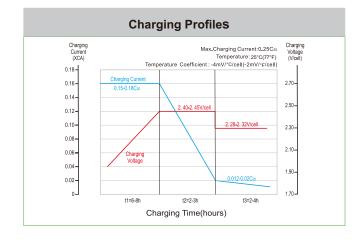

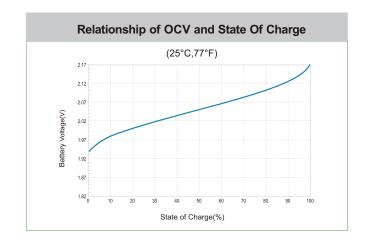

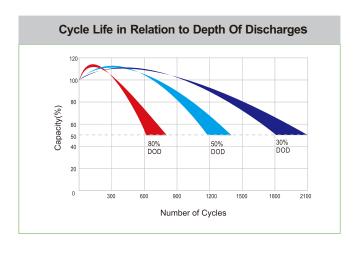

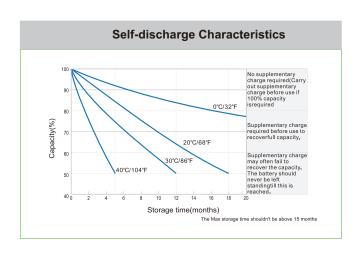

Leoch International Technology Ltd.

@ www.leoch.com

Leoch Batteries Pte Ltd

m www.leoch.sg

Leoch Battery Corporation

www.leochamericas.com

Leoch Europe S.A.

www.leoch.eu